




A240CX-BD/CD/DD Flameproof Coil Solenoid Valves Ex db IIC T6 Gb

A240X-BD/CD/DD type 3/2 way and 5/2 way solenoid valves with namur interface configuration are interchangeable for use on either double or single acting pneumatic actuators in potentially explosive environments. CNOMO based flameproof coils are available with M20x1,5 or 1/2" NPT threaded connection for use with standard or armoured cable glands (supplied optionally)

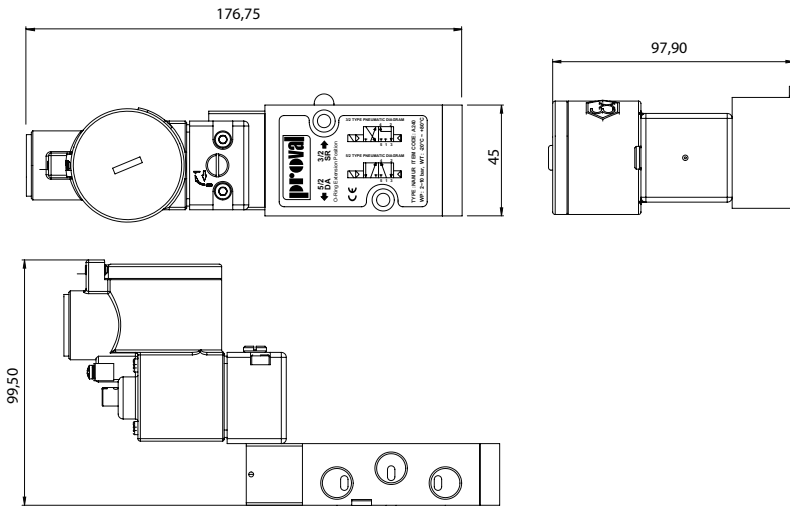


Technical Specifications;

Type	NAMUR
Power Supply	24VDC / 230VAC
Function	3/2 or 5/2
Working Pressure	2-10 bar
Air Supply	G1/4" / NPT 1/4"
Electrical Connection	M20x1,5 / 1/2" NPT
Working Temperatur	-20 °C ~ + 60 °C
Flow Capacity	720 Lt/min
ATEX Certificate	Ex II 2G Ex db IIC T6 Gb

A244CX-BD/CD/DD Flameproof Dual Coil Solenoid Valves Ex db IIC T6 Gb

A244CX Series valves are suitable for NAMUR interface pneumatic actuators for use in potentially explosive areas, spring return to middle position, with manual override, centre closed with flameproof ATEX coils. CNOMO based flameproof coils are available with M20x1,5 or 1/2" NPT threaded connection for use with standard or armoured cable glands (supplied optionally)

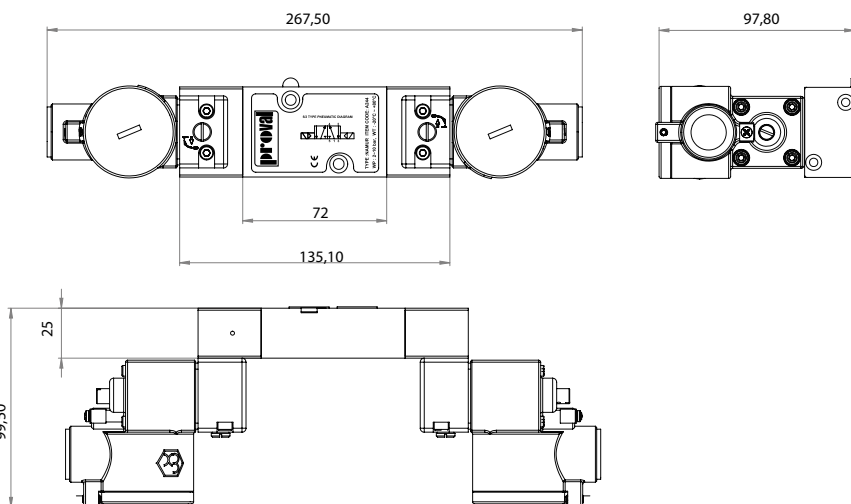

Technical Specifications;

Type	NAMUR
Power Supply	24VDC / 230VAC
Function	5/2 or 5/3
Working Pressure	2-10 bar
Air Supply	G1/4"
Electrical Connection	M20x1,5 / 1/2" NPT
Working Temperatur	-20 °C ~ + 60 °C
Flow Capacity	720 Lt/min
ATEX Certificate	Ex II 2G Ex db IIC T6 Gb